

Super Runner Value Gas Fryers -- Domestic & Export

Project
Item
Quantity
CSI Section 11400
Approval
Date

Models

☐ SR142G

☐ SR152G

☐ SR162G



Shown with optional casters.

Standard Features

- Tube-type frypot design
- Oil capacity

SR142G -- 43 lb. (21 liter)

SR152G -- 50 lb. (25 liter)

SR162G -- 75-lb. (37 liter)

• Btu/hr. input

SR142G -- 105,000 (26,481 kcal)

(30.8 kw) (3-tube)

SR152G -- 120,000 (30,600 kcal)

(35.2 kw) (4-tube)

SR162G -- 150,000 (37,783 kcal)

(44 kw) (5-tube)

Frving area

SR142G 14" x 13-3/4" x 4-1/5" (35 x 34.9 x

10.7 cm)

SR152G 14" x 14" x 3-1/2" (35 x 35 x 8.5

cm)

SR162G 18" x 18" x 3-3/4" (46 x 46 x 9.5

cm)

• Durable temperature probe

- Millivolt control system requires no electrical hookup
- Thermo-tube design
- · Wide cold zone
- Stainless steel frypot, front, door, and backsplash/flue cover, aluminized sides
- Basket hanger
- 6" (15 cm) adjustable steel legs
- 3/4" (1.9 cm) NPT gas connection
- Basket support rack
- Two twin baskets

Options & Accessories

- ☐ Casters
- ☐ Frypot covers
- ☐ Natural and LP gas
- ☐ Full basket
- ☐ Triplet basket
 - (SR162 only)

Specifications

Basic Frying At Its Best -- Designed For All-Purpose Usage

Fry a wide variety of products with Dean's Super Runner fryers which easily accommodate items from French fries to main entree menu selections. The fryers are available in three oil capacities utilizing 43 lbs., 50 lbs. and 75 lbs. of oil.

Make the most of your energy dollars with Dean's exclusive Thermo-Tube design. The heating tubes provide a large oil contact surface. Flow-tube baffles control the transfer of heat into the oil. Dean's wide cold zone frypot protects oil integrity by trapping debris under the cooking area, preventing carbonization of particles and wasteful oil deterioration.

Dean's durable temperature probe assures prompt recovery which reduces time lost between loads and requires no electrical hookup.

Dean's Super Runner gas fryers achieve dependability through simplicity of design, durable stainless steel baffles and rugged cast iron burners.









SR142 and SR162 Approved for Australia

8700 Line Avenue Shreveport, LA 71106 USA Tel: 318-865-1711

Tel: 1-800-221-4583

Fax: 318-868-5987

E-mail: info@frymaster.com


www.frymaster.com

Bulletin No. 830-0117 Revised 1/19/16 Litho in U.S.A. ©Frymaster



USA



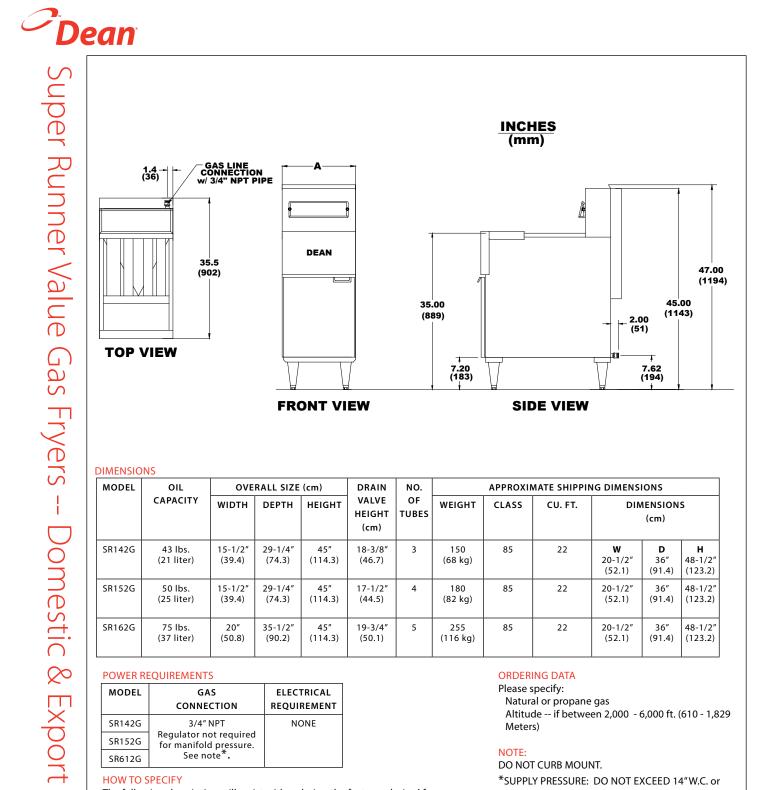

MODEL	OIL	OVERALL SIZE (cm)			DRAIN	NO.	APPROXIMATE SHIPPING DIMENSIONS					
	CAPACITY	WIDTH	DEPTH	HEIGHT	VALVE OF HEIGHT TUBES (cm)	WEIGHT	CLASS	CU. FT.	DIN	(cm)	S	
SR142G	43 lbs. (21 liter)	15-1/2" (39.4)	29-1/4" (74.3)	45" (114.3)	18-3/8" (46.7)	3	150 (68 kg)	85	22	W 20-1/2" (52.1)	D 36" (91.4)	H 48-1/2" (123.2)
SR152G	50 lbs. (25 liter)	15-1/2" (39.4)	29-1/4" (74.3)	45" (114.3)	17-1/2" (44.5)	4	180 (82 kg)	85	22	20-1/2" (52.1)	36" (91.4)	48-1/2' (123.2)
SR162G	75 lbs. (37 liter)	20" (50.8)	35-1/2" (90.2)	45" (114.3)	19-3/4" (50.1)	5	255 (116 kg)	85	22	20-1/2" (52.1)	36" (91.4)	48-1/2" (123.2)

ORDERING DATA Please specify:

Meters)

NOTE:

Natural or propane gas

DO NOT CURB MOUNT.

Altitude -- if between 2,000 - 6,000 ft. (610 - 1,829

*SUPPLY PRESSURE: DO NOT EXCEED 14"W.C. or

No warranty for mobile kitchen applications.

POWER REQUIREMENTS

MODEL	GAS	ELECTRICAL						
	CONNECTION	REQUIREMENT						
SR142G	3/4" NPT	NONE						
SR152G	Regulator not required for manifold pressure.							
SR612G	See note*.							

HOW TO SPECIFY

The following description will assist with ordering the features desired for this equipment:

SR142 43-lb (21-liter) tube-type gas fryer with millivolt controller and durable temperature probe

SR152 50-lb (25-liter) tube-type gas fryer with millivolt controller and

durable temperature probe

75-lb (37-liter) tube-type gas fryer with millivolt controller and SR162 durable temperature probe

E-mail: info@frymaster.com

www.frymaster.com

Bulletin No. 830-0117 Revised 1/19/16 Litho in U.S.A. ©Frymaster anıtowoc Foodservice

8700 Line Avenue Tel: 318-865-1711 Shreveport, LA 71106 Tel: 1-800-221-4583 Fax: 318-868-5987