#### Height: 35.0" Width: 11.6" Depth: 23.7" (88.9cm) (60.2cm) (29.5cm)



Server(s) sold separately

## **Specifications**

Product #: 52000.0100

Water Access: Plumbed

Finish: Stainless

Funnel: Translucent Tea Funnel

### **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
120	14	1700	Yes	NEMA 5-15P	336	60°F (15.5°C)	1	2	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine if the machine is marked with the before mentioned ratings.

## **Plumbing Requirements**

#### CAD Drawings

	<b>J</b> 1		3			
PSI	kPa Fitting Supplied Water Flow Required (GPM)		2D	Revit	KLC	
20-90	138-621	1/4" Male Flare Fitting	1.25	•		

WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle



the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

ITB

- Sleek, modernized design language on the brewer, with rounded angles on the corners and trunk
- Digital readout displays in English, Spanish, or French --- for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- BUNN Infusion Series technology allows for multiple recipes from one footprint --with three brew buttons and two batch sizes
- · Easy pulse display allows for simplified programming of pulse routine
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction<sup>™</sup> Sprayhead is multi-directional with a 7-hole design to ensure ultimate uniformity of extraction
- · Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- · Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing
- Includes overlay kit for customization of brewer interface


Agency:





Additional Features

Funnel Locks

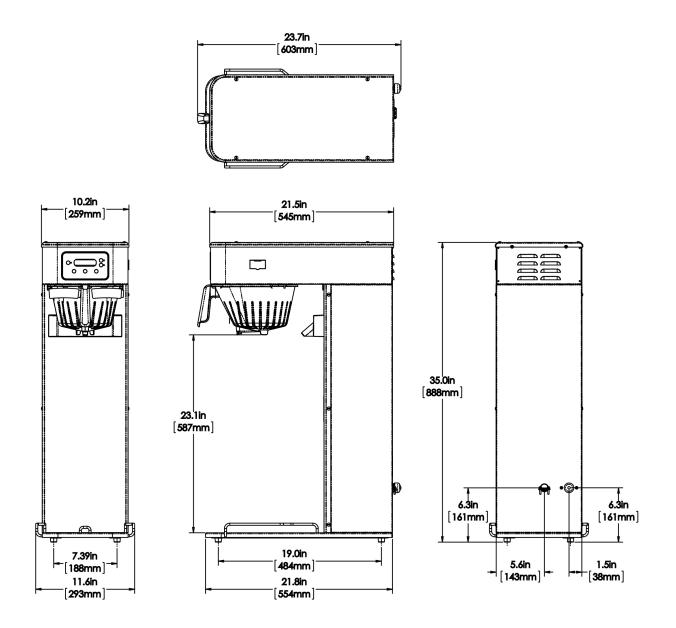

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	35.0 in.	11.6 in.	23.7 in.	38.0 in.	13.3 in.	27.4 in.	41.500 lbs	7.976 ft <sup>3</sup>	
Metric	88.9 cm	29.5 cm	60.2 cm	96.5 cm	33.7 cm	69.5 cm	18.824 kgs	0.226 m³	



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 07/20/2021

 For most current specifications and other info visit bunn.com.
 07/20/2021

# Related Products & Accessories:ITB(52000.0100)





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

# Serving & Holding Options: ITB(52000.0100)





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.