SINGLE SH DBC® SST 120V FLKLwr Fct

Height: 35.8" Width: 9.3" Depth: 24.7" (90.9cm) (23.6cm)

(62.7cm)

Server(s) sold separately

Specifications

Product #: 33600.0029

Water Access: Plumbed

Interface: Wireless

Finish: Stainless

Electrical & Capacity

Vol	lts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
12	20	15.8	1900	Yes	NEMA 5-15P	85	60°F (15.5°C)	1	2	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

CAD Drawings

	3 1				3-	
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	1/4" Male Flare Fitting	-	•		
•						

MARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 06/28/2021

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

• Brews 1/2, 1 or 1 1/2gal (1.9, 3.8 or 5.7L) batches

- Brews 11.4gal (43.2L) of perfect coffee per hour
- Consistently brew perfect coffee using Digital Brewer Control[™] with pulse brew
- Reduce accidents with safety features that decrease hot splashes from funnel, eliminate brewing when funnel or server is not present
- · Simplify installation and calibration by creating your own recipe cards and dedicated funnels with the BrewWISE Recipe Writer using your PC (Windows® compatible).
- SplashGard® funnel deflects hot liquids away from the hand
- · Energy saver mode reduces tank temperature during idle periods
- · Operate any combination of BrewWISE equipment error-free with wireless brewergrinder interface through Smart Funnel with SplashGard®
- Stores individual coffee and flavor profiles using adjustable water volume, bypass percentage, pulse brew, and pre-infusion timing
- Troubleshoot all switches and electrical components from the front panel with advanced diagnostic service tools
- Funnel locks help improve safety
- Servers not included unless otherwise noted

Agency:

Funnel: Smart Funnel


Faucet: Lower





Additional Features

BrewWISE

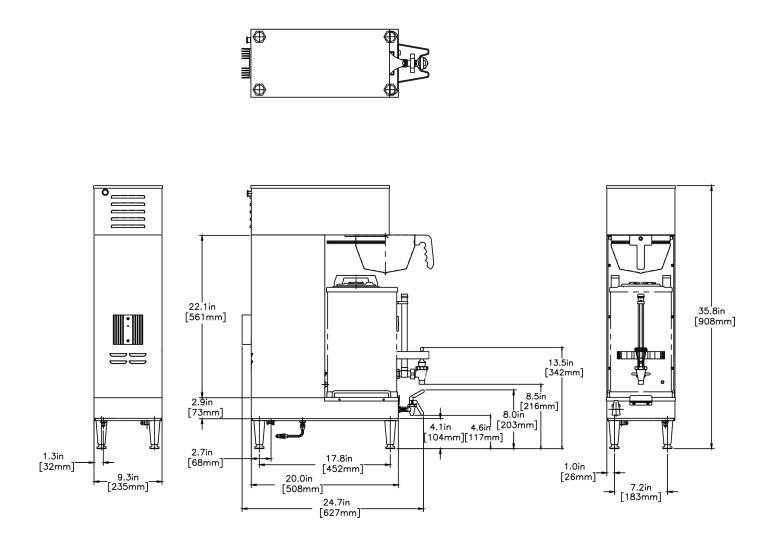

		Unit		Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	35.8 in.	9.3 in.	24.7 in.	39.8 in.	12.8 in.	27.1 in.	59.000 lbs	7.995 ft ³
Metric	90.9 cm	23.6 cm	62.7 cm	101.0 cm	32.5 cm	68.9 cm	26.762 kgs	0.226 m³



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
Last Updated:

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
06/28/2021

For most current specifications and other info visit bunn.com.
Control of the second seco

Related Products & Accessories: SINGLE SH DBC® SST 120V FLKLwr Fct(33600.0029)





Serving & Holding Options: SINGLE SH DBC® SST 120V FLKLwr Fct(33600.0029)



