AXIOM®-DV-APS

Height: 23.6" Width: 9.0" Depth: 22.5" (59.9cm) (57.2cm) (22.9cm)



Server(s) sold separately

Specifications

Product #: 38700.0010

Water Access: Plumbed

Finish: Stainless

Funnel: Black Plastic

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H²O Temp.	Phase	# Wires plus Ground	Hertz
120	12.5	1500	Yes	NEMA 5-15P	67	60°F (15.5°C)	1	2	60
120/208	13	2680	-	N/A	121	60°F (15.5°C)	-	-	-
120/240	15	3550	-	N/A	121	60°F (15.5°C)	-	-	-

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

CAD Drawings

11/05/2021

		<u> </u>				
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	1/4" Male Flare Fitting	-	•		

WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle



Last Updated: the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

- · Adjusts automatically to varying water pressure
- · Electronic diagnostics and built-in tank drain make service easier
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels
- Large 200oz. (5.9L) tank provides back-to-back brewing capacity
- Ensure coffee quality with programming for brew level, cold brew lock- out and tank temperature, set easily from the front of the machine
- Coffee extraction controlled with programmable pre-infusion, pulse brew and digital temperature precision
- Brews directly into 1.9 to 3L airpots
- · Energy-saver mode reduces tank temperature during idle periods
- Hot water faucet
- SplashGard® funnel deflects hot liquids away from the hand
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)
- PROP 65 Warning Decal included in packaging with equipment
- · Servers not included unless otherwise noted


Agency:

Faucet: Upper





DBC

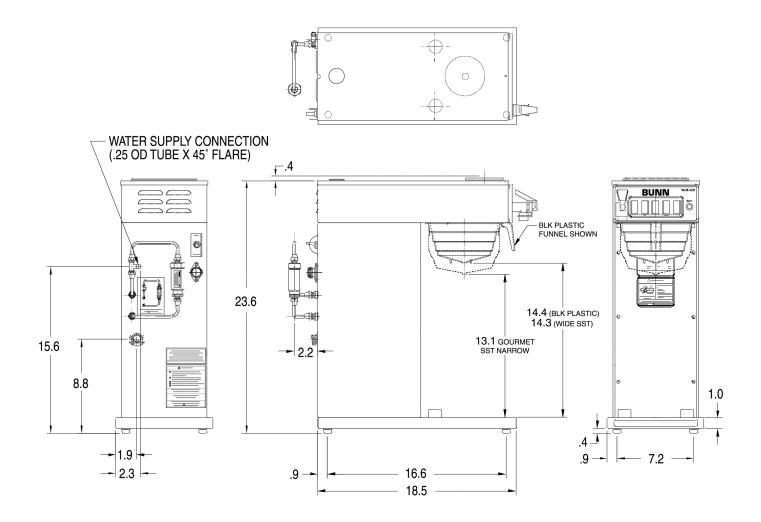

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	23.6 in.	9.0 in.	22.5 in.	29.0 in.	11.9 in.	25.8 in.	35.200 lbs	5.145 ft ³	
Metric	59.9 cm	22.9 cm	57.2 cm	73.7 cm	30.2 cm	65.6 cm	15.967 kgs	0.146 m³	



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 11/05/2021

 For most current specifications and other info visit bunn.com.
 11/05/2021


Related Products & Accessories: AXIOM®-DV-APS(38700.0010)





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Serving & Holding Options: AXIOM®-DV-APS(38700.0010)

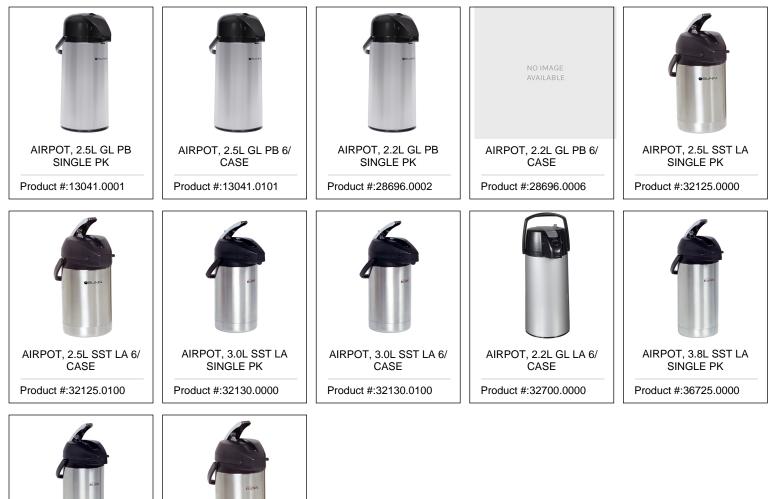

AIRPOT, 3.8L SST LA 6/ CASE Product #:36725.0100





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last Updated: the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. 11/05/2021 For most current specifications and other info visit bunn.com.